

2-3-3 Transistor and Combination Output Board

K3NR with Transistor Output Board, K31-T1 or K31-T2




K3NR with Linear Output Board, K31-L4, -L5, -L6, -L9, -L10

K3NR with RS-485 + 5 Relay Output Boards, K31-FLK5

K3NR with BCD Output Board, K31-B2 or K31-B4

K3NR with RS232C + 5 Transistor Output Boards, K31-FLK4

K3NR with RS-422 + 5 Transistor Output Boards, K31-FLK6

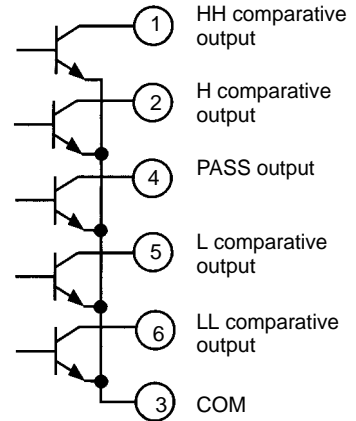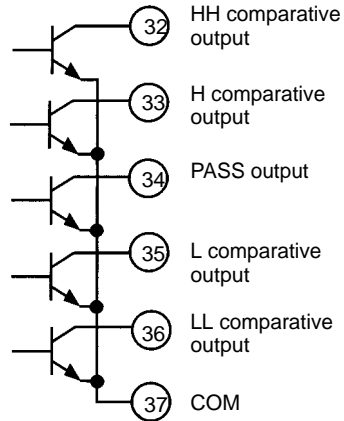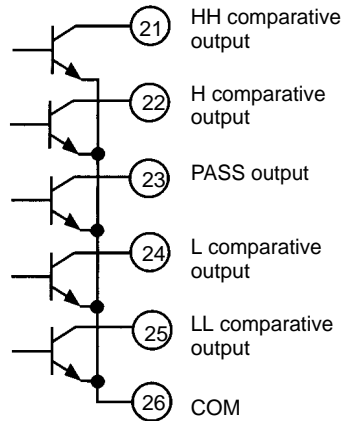

The following transistor output conditions are required.

Maximum rated voltage: 24 VDC

Load current: 50 mA

Current leakage with transistor turned off: 100 μ A